

Aluminum PC Case Installation Guide

Case components:




Reset switch button Power switch button Power LED HDD LED 5.25" mounting bezel 5.25" to 3.5" convertor





Hardware list


* Extra quantities are spare parts.




Side panels installation



Loose the screw and pull the latch to release the side panel.



Remove the side panel.



Adding a lock to secure the hardware.

Fan adjustable device



3.5" Hard disk installation



Loose thumb screws to remove the HDD cage.




Insert HDD, secured with thumb screws.



Insert the HDD cage to the mounting position.




Fasten the thumb screw to secure the HDD cage.

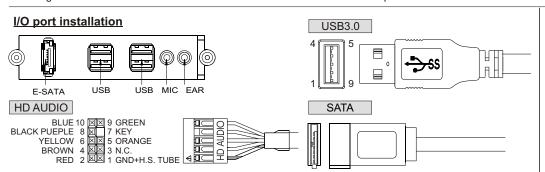




For access to rear I/O port.

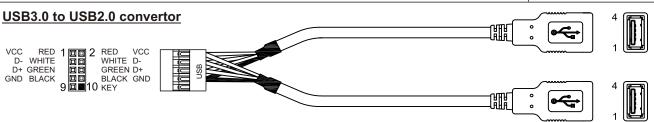


Motherboard installation



Secure the stand-off on the M/B tray which match with the M/B fix points, place the M/B on the stand-off fasten with the thumb screws to secure.

PCI Add-on card installation




Open the aluminum latch to remove the PCI slot bracket.



Push the card into the PCI slot, close the aluminum latch to secure the card.


ODD installation




1. Remove the 5.25" to 3.5" converter.



2. Remove the 5.25" ODD bezel.




3. Slide the 5.25" ODD bezel downwards to remove it.





5. Push the CD-ROM into the ODD cage module, close the bracket to secure.





If you wish to use the 5.25" ODD bezel, please adjust the metal pin position on the mounting bracket




Adding the rubber pad to ODD's eject bottom, when 5.25" ODD bezel couldn't reach to the ODD.


PSU tray installation



Loosing four thumb screws to remove the PSU mounting bracket.



Assembling the power supply with PSU mounting bracket, and push in gently.



Fasten four thumb screws onto the case to secure.



Remove the HDD cage for long PSU.

PSU installation



Place the PSU on the stand, and push again the rear panel.



Place the PSU bracket into according slot as shown.



Lock the PSU bracket to secure the PSU. For transportation, please place screw to secure the PSU

Vents for water cooling



Place the water tube through the rabber cover.

Removable upper double fan module



Loosing screws to remove fan module.





Follow the arrow to remove the filter, press the plastic clips to release the washable air filter.

